



## Expandable Bar Cabinet CF4001

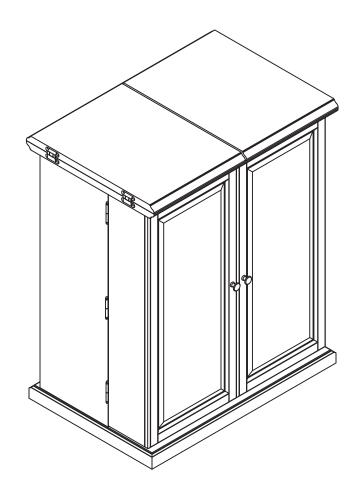

## **PART LIST**

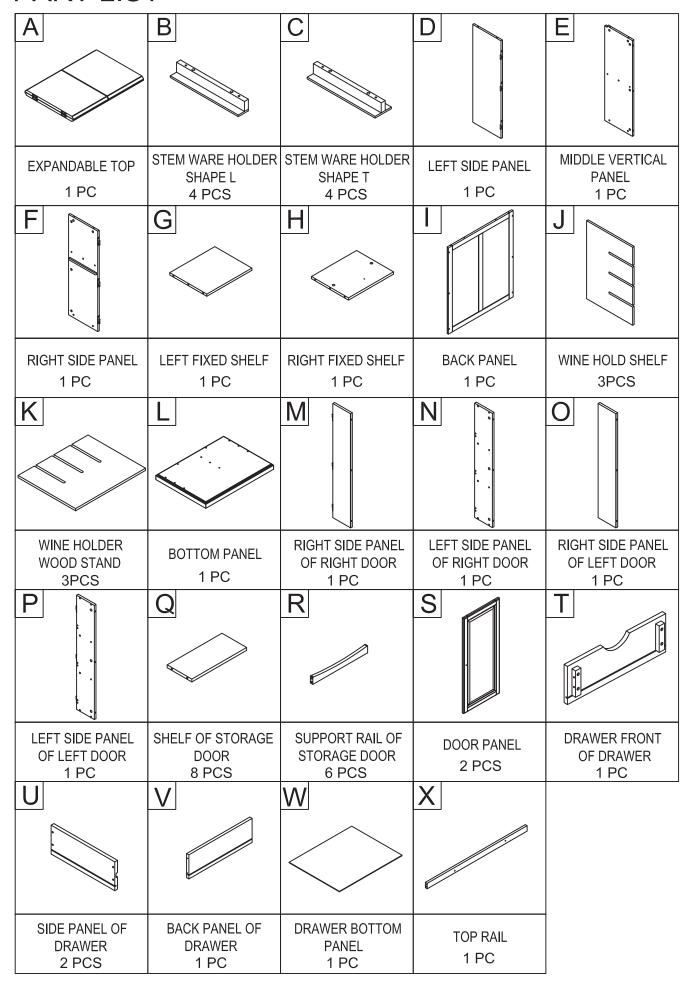

## HARDWARE LIST


1	2	3	4	5
CAM LOCK 46 PCS(Extra 2)	CAM BOLT 46 PCS	WOOD DOWEL 73 PCS	SCREW 10 PCS(Extra 1)	HEX SOCKET HEAD BOLT 6 PCS
6	7	8	9	10
BARREL NUT 6 PCS	STOPPER 1 PC	KNOB 2 PCS	ROUND HEAD BOLT 2 PCS	DOOR CATCH 2 PCS
11	12	13	14	15
			1-1/2″*ø4*D8	
PAD 4 PCS	ROUND HEAD SCREW 5 PCS(Extra 1)	ALLEN KEY 1 PC	SCREW 16 PCS(Extra 1)	SAFETY STRAP KIT 1 PC

ADDITIONAL TOOLS (Not Provided)


Note:It is not recommended to use power tools during assembly. However a screw gun can assist with mounting.




Insert Cam Bolts (Part #2) into pre-drilled holes of Parts A, D, E, F, I, M, N, O, P & S with Step 1. a Phillips Head screw driver as shown. Attach Hardware Knobs (Part #8) to Door Fronts (Parts S) with Round Head Bolts (Part #9) using Phillips Head screwdriver as shown. Attach Door catchs (Part# 10) to Part E with Round Head Screws (Part# 12) using Phillips Head Screw driver as shown. F Е D 12 12 2 12 **8**2 92 **3**2 32 **2 8**2 **2** 4

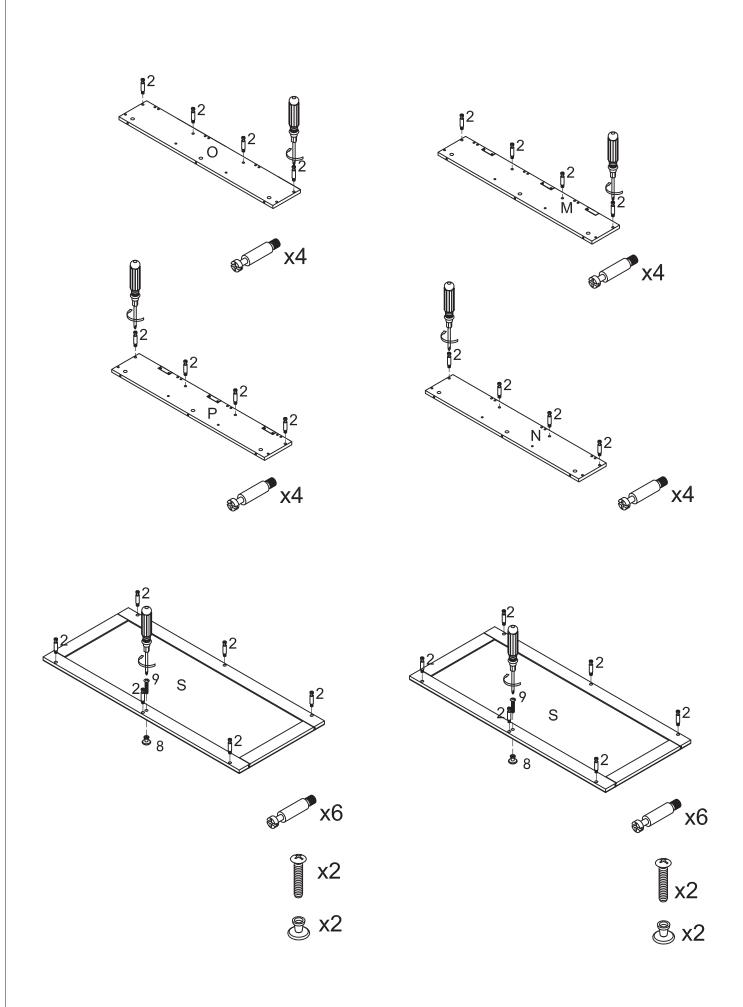



Step 2. Attach Stopper (Part #7) to Part H with Round Head Screw (Part #12) into pre-drilled hole using Phillips Head screw driver as shown. Attach Parts E & F to Part H using Wood Dowels & Cam Locks as shown.



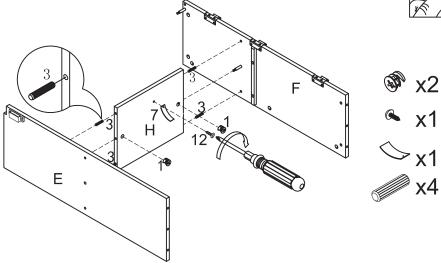



Step 3. Attach Part X to Part F with Wood Dowel and Cam Lock as shown. Now attach Part G to Part E using Wood Dowels & Cam Locks as shown. Finally, attach Part D to Parts G & X using Wood Dowels & Cam Locks as shown.

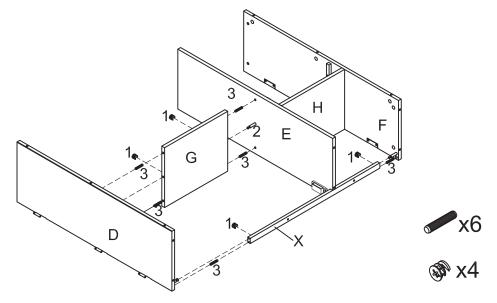




Step 4. Attach Back Panel I to Parts D & F using Cam Locks as shown.




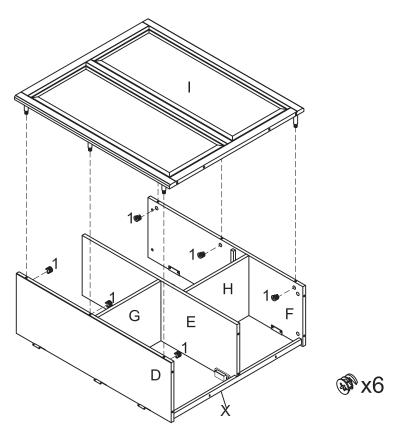


Step 5. Carefully turn cabinet onto its end with Part X flat on the floor. Attach Base L to Parts D, E, F, & I using Wood Dowels and Barrel Nuts as shown. Attach legs using Hex Socket Head Bolts & Wood Dowels (as shown in instruction manual included in carton with legs). Carefully turn cabinet over so that legs are now on the floor.

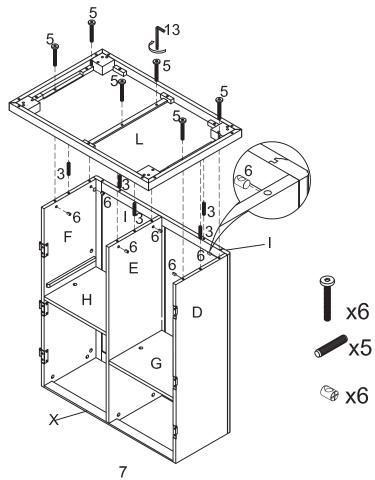


Step 6. Attach Stem Ware Holders (Parts B & C) to Expandable Top A with Wood Dowels and 1 ½" Screws (Part #14) using Phillips Head screw driver as shown. Note: Pay close attention to positioning of Parts B & C. Stem Ware Holder B is an L shaped part. Holder C is a T shaped part. DO NOT OVER TIGHTEN SCREWS!

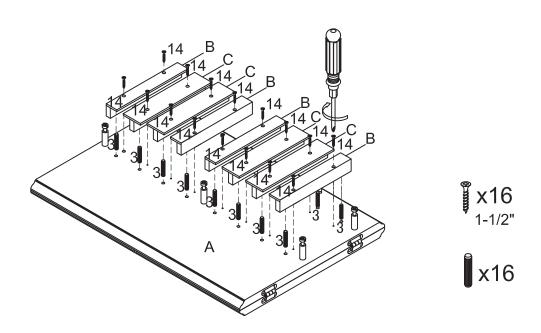


Step 7. Attach Expandable Top A to Parts D, E, F, & I with Wood Dowels & Cam Locks as shown. Secure Rail X to Expandable Top A with Screws (Part #4) using Phillips Head screw driver as shown.

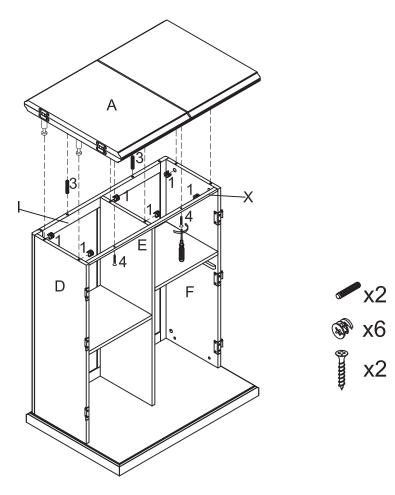


Step 8 Attach Drawer Sides U to Drawer Front T with Screws (Part #4) through the pre-drilled holes using Phillips Head screw driver as shown. Note: The large grooves in the middle of Drawer Sides U should be facing outward & the thin grooves should be aligned with the thin groove in Drawer Front T. Slide Bottom Panel W into grooves of Drawer Sides U as shown. Attach Drawer Back V to Side Panels U with Screws (Part #4) through pre-drilled holes using Phillips Head screw driver as shown.

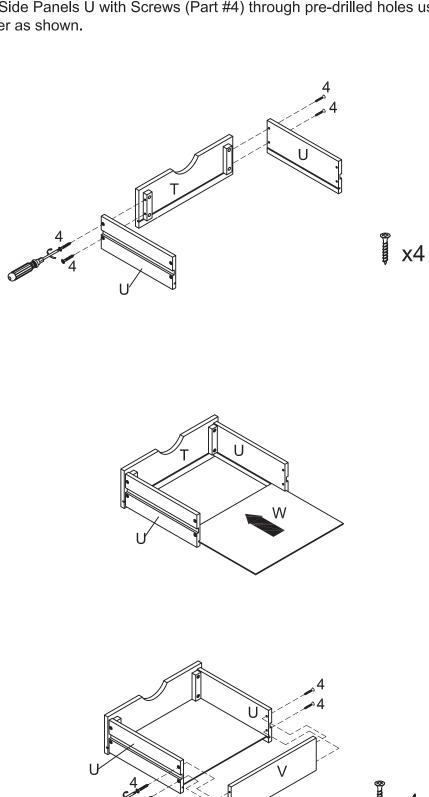



Step 9. Slide Parts J & K together to create wine storage grid. Insert assembled Parts J & K into their appropriate position as shown. Insert assembled drawer from Step 8 into its appropriate position as shown.



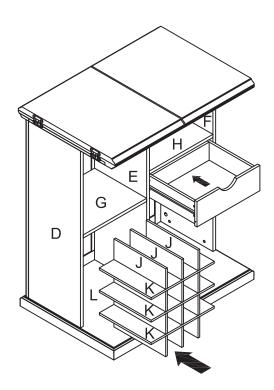

Step 10. **(Front Left Storage Door)** - Attach Part Q to Door Side O with Wood Dowels & Cam Locks as shown. Set Rails R into place on Door Side O with Wood Dowels as shown. Attach Door Panel P to Parts Q & R with Wood Dowels and Cam Locks as shown. Lay Door Cabinet flat with parts R flat on floor. Attach Door Front S to Door Sides O & P with Cam Locks as shown.



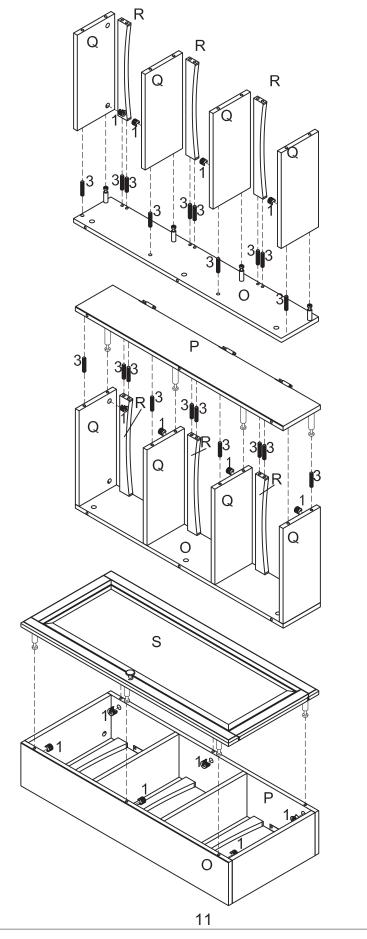











Step 11. (Front Right Storage Door) - Attach Part Q to Door Side M with Wood Dowels & Cam Locks as shown. Set Rails R into point arrow on car lock toward place on Door Side M with Wood Dowels as shown. Attach adjacent hole Door Panel N to Parts Q & R with Wood Dowels and Cam Locks as shown. Lay Door Cabinet flat with parts R flat on floor. Attach Door Front S to Door Sides M & N with Cam Locks as shown. turn clockwise to fasten 3 **ॐ** x4 **x**10 3 Ν M **ॐ** x6


12


Attach Assembled Front Left & Right Storage Doors to cabinet by aligning the hinges on the door with the hinges on the cabinet, and lowering into place. Put the PAD (Part 11) on the door. Note:

Be sure that the hinges on the doors have lowered completely into place, and are flush with the hinges on the cabinet before closing the doors.

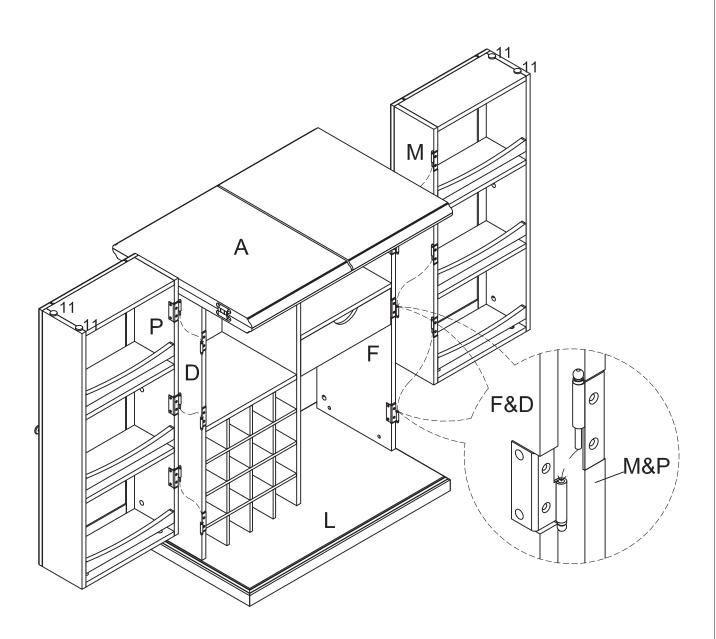

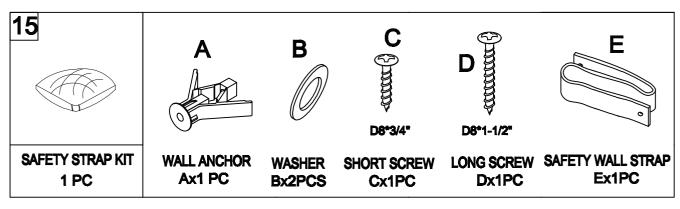

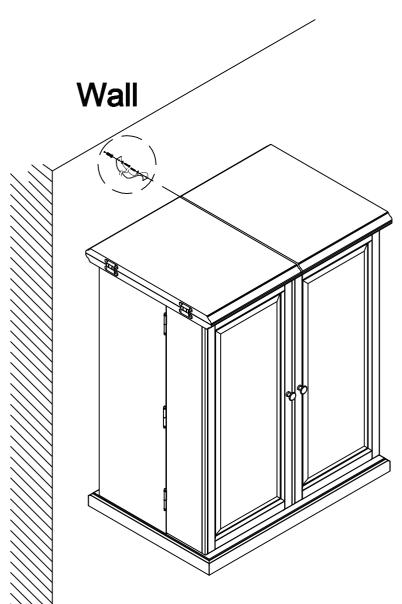



Step 13
SAFTY WALL STRAP ASSEMBLY
INSTRUCTION

- 1) Insert Short Screw(Part#C)through Washer(Part#B) and Safty Wall Starp(Part#E) and screw it into Parts I.
- 2) Drill a 9mm hole at a point where you want to secrue/attach your Cabinet. Make sure that the height of the hole being drilled into the wall is equal to the height of the hole in part I.Tap Wall Anchor (Par t #A) into the hole.
- 3) Insert Long Screw (Part#D) through a Washer (Part #B) and Wall Safty Strap (Part#E) into Wall Enchor (Part#A).

Note: This item is not intended for clothing storage use.

