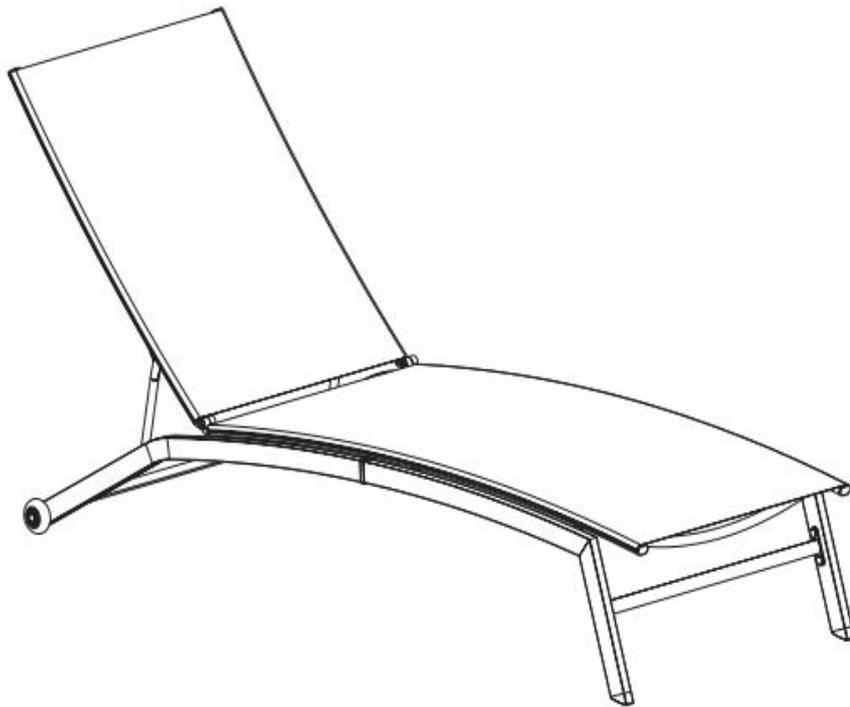








CROSLEY

FURNITURE





Outdoor Sling Chaise Lounge CO6310



PART LIST



| | | | | | | | | | |
|------------------|---|----------------------|---|-----------------------|---|-------------------------|--|--------------|---|
| A |  | B |  | C |  | D |  | E |  |
| Left Leg 1 PC | | Right Leg 1 PC | | Left Back Leg 1 PC | | Right Back Leg 1 PC | | Seat 1 PC | |
| F |  | G |  | H |  | I |  | | |
| Back 1 PC | | Support Tube 1 PC | | Middle Pole 2 PCS | | Plastic Spacer 2 PCS | | | |

HARDWARE LIST

| | | | | | | | | | |
|----------------------------|---|---------------------------------|---|-------------------------------|---|--------------------------------|--|---------------------------------|---|
| #1 |  | #2 |  | #3 |  | #4 |  | #5 |  |
| M6*18mm | | M6*15mm | | M6*10mm | | | | | |
| Bolt 2 PCS (Extra 1) | | Medium Bolt 18 PCS (Extra 1) | | Short Bolt 2 PCS (Extra 1) | | Barrel Bolt 2 PCS (Extra 1) | | Plastic Cap 28 PCS (Extra 1) | |
| #6 |  | #7 |  | | | | | | |
| M6mm | | | | | | | | | |
| Nut Cap 4 PCS (Extra 1) | | Allen Wrench 2 PCS (Extra 1) | | | | | | | |

Step 1. Attach back (part F) to seat (part E) using short bolts (part #3), barrel bolts (part #4) and allen wrenches (part #7). Remove all protective caps from seat (part E).

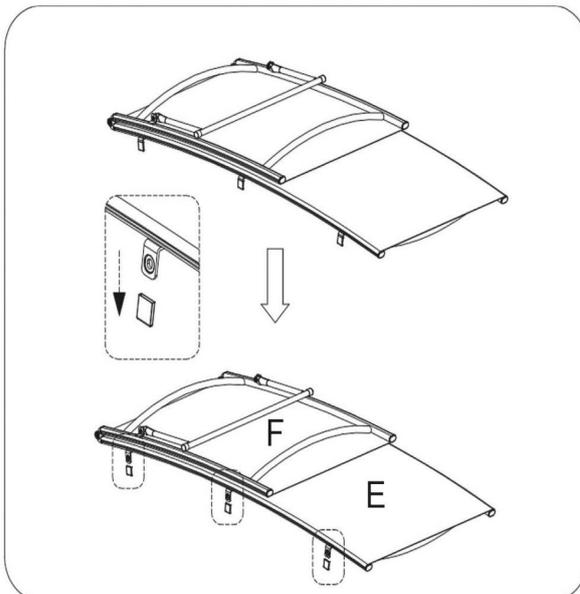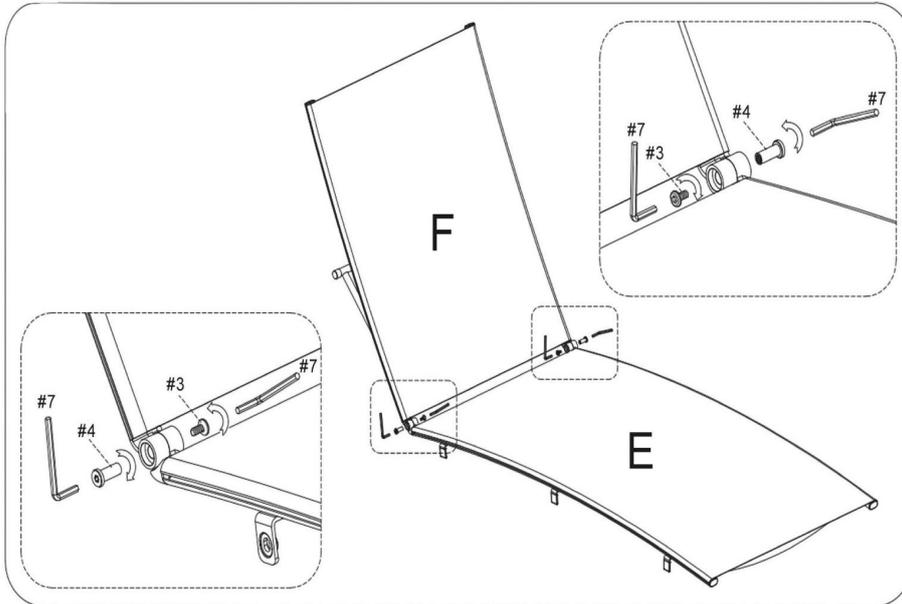
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- | | | |
|----|---|-----|
| #3 |  | x 2 |
| #4 |  | x 2 |
| #7 |  | x 1 |

Step 2. Insert left back leg (part C) into left leg (part A) and right back leg (part D) into right leg (part B) using plastic spacer (part I). Secure assembled unit (parts A, B, C, D & I) using bolts (part #1) and allen wrench (part #7). Attach plastic cap (part #5) and nut cap (part #6) to wheel on back legs (parts C & D). Insert plastic caps (part #5) into back legs (parts C & D).

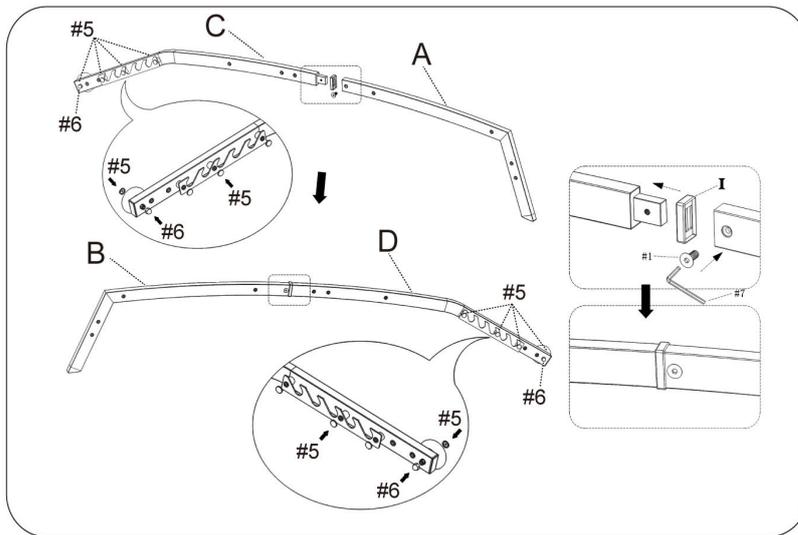
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- | | | |
|----|---|-----|
| #1 |  | x 2 |
| #5 |  | x 8 |
| #6 |  | x 2 |
| #7 |  | x 1 |

Step 3. Carefully place assembled unit (parts A & C) on a soft flat surface. Attach seat (part E) to assembled unit (parts A & C) using medium bolts (part #2), plastic caps (part #5) and allen wrench (part #7).

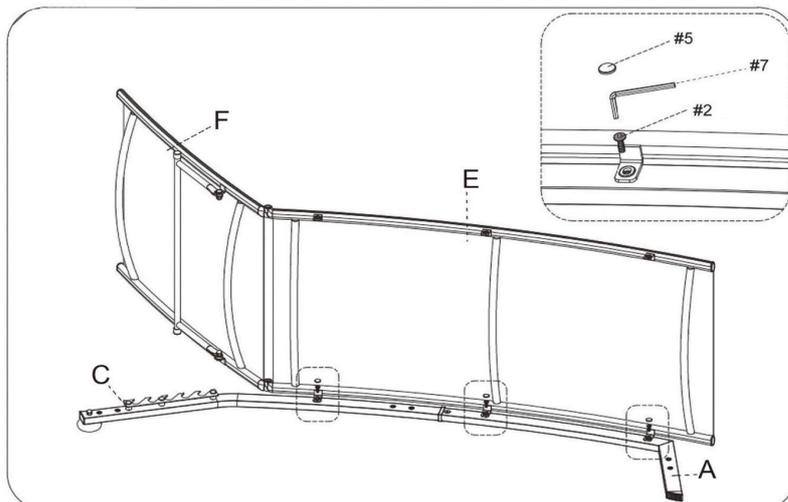
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- | | | |
|----|---|-----|
| #2 |  | x 3 |
| #5 |  | x 3 |
| #7 |  | x 1 |

Step 4. Attach seat (part E) to assembled unit (parts B & D) using medium bolts (part #2), plastic caps (part #5) and allen wrench (part #7).

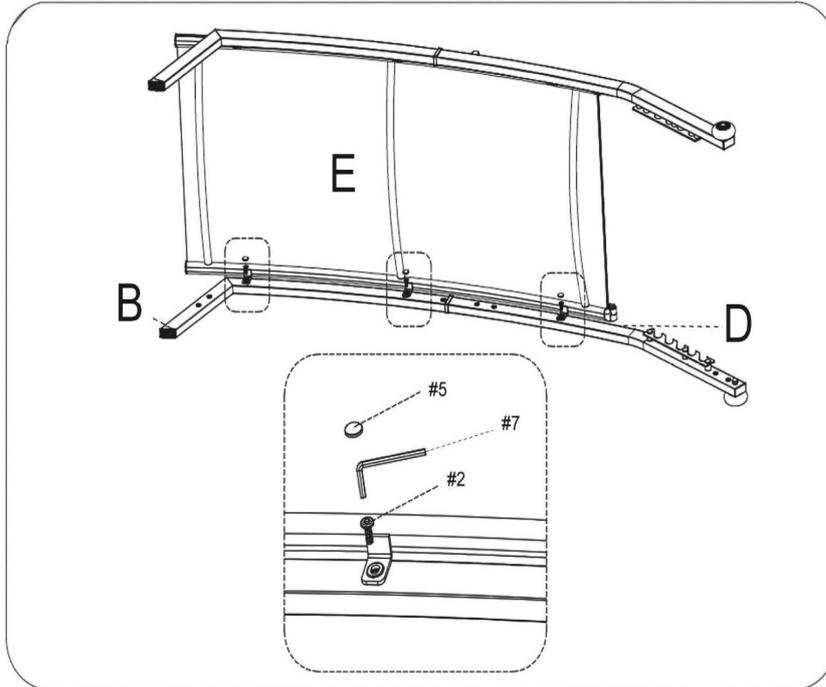
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- | | | |
|----|---|-----|
| #2 |  | x 3 |
| #5 |  | x 3 |
| #7 |  | x 1 |

Step 5. Attach support tube (part G) to seat (part E) using medium bolts (part #2), plastic caps (part #5) and allen wrench (part #7).

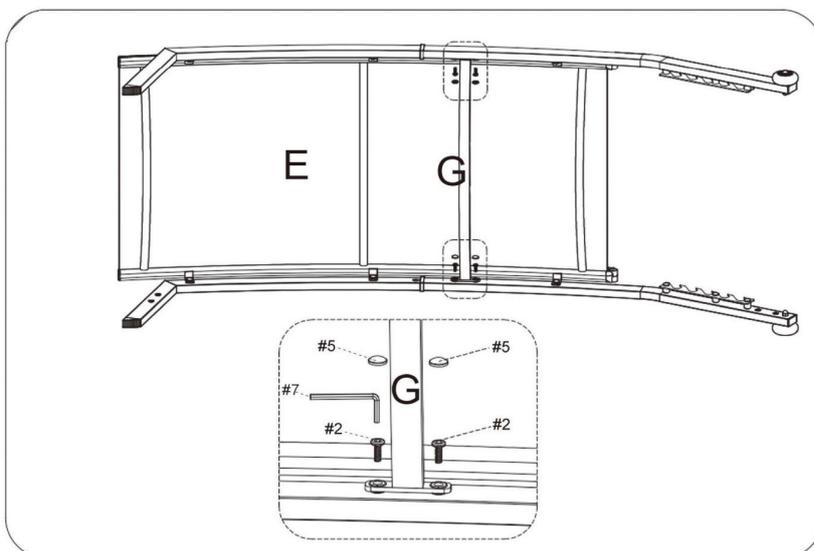
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- | | | |
|----|---|-----|
| #2 |  | x 4 |
| #5 |  | x 4 |
| #7 |  | x 1 |

Step 6. Attach middle pole (part H) to legs (parts A & B) using medium bolts (part #2), plastic caps (part #5) and allen wrench (part #7).

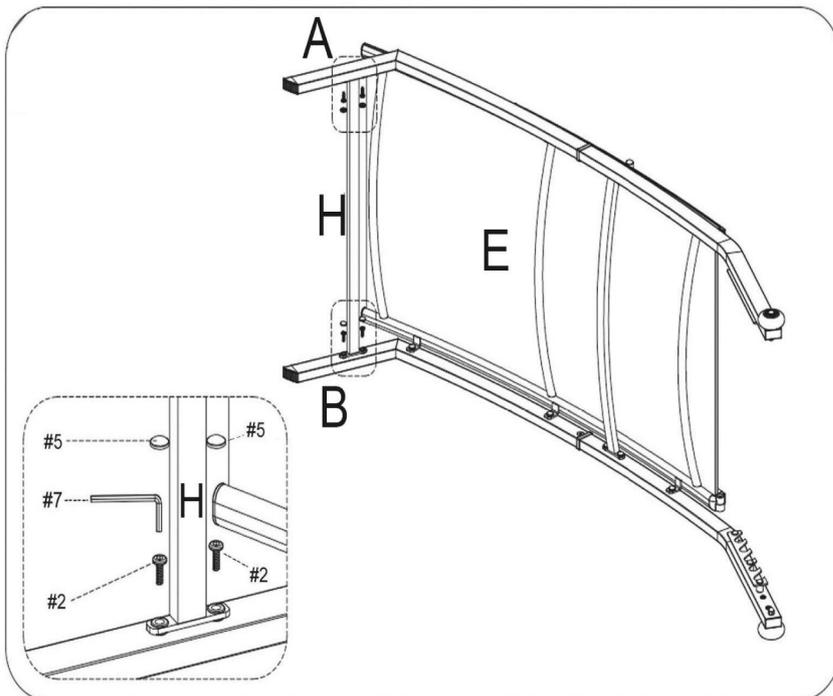
NOTE: Please don't fully tighten bolts until unit is fully assembled.



- #2  x 4
- #5  x 4
- #7  x 1

Step 7. Attach middle pole (part H) to back legs (parts C & D) using medium bolts (part #2), plastic caps (part #5) and allen wrench (part #7).

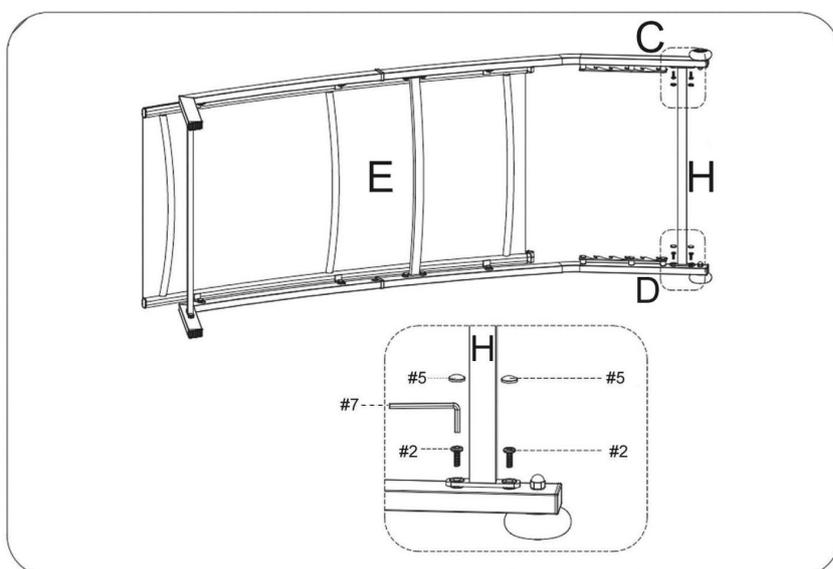NOTE: Please don't fully tighten bolts until unit is fully assembled.



- #2  x 4
- #5  x 4
- #7  x 1

Step 8. Attach plastic caps (part #5) and nut caps (part #6) to back (part F).

NOTE: Please fully tighten all bolts at this time.

