



Bar Cabinet CF4011

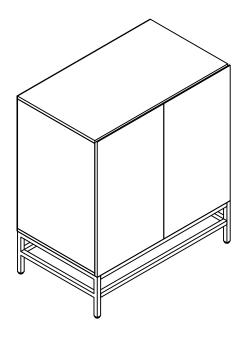

PART LIST

1 PC

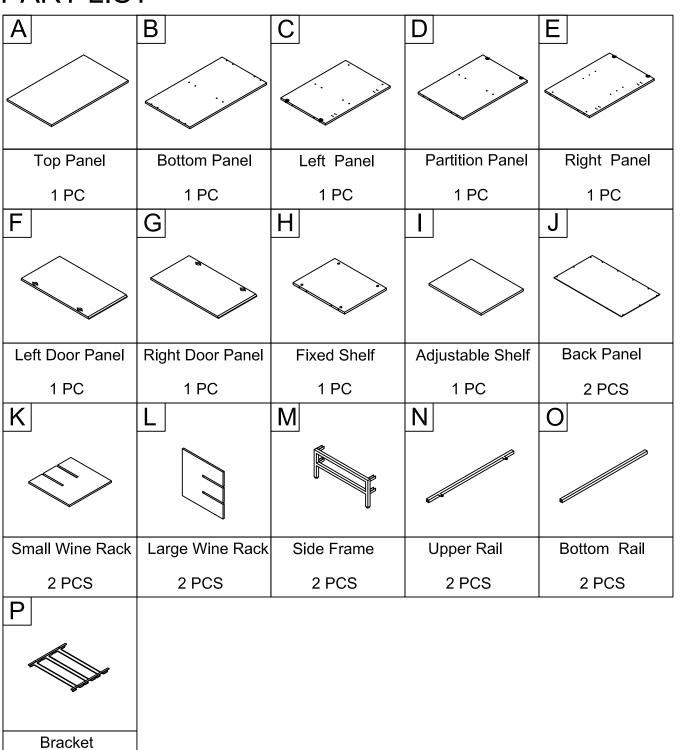

HARDWARE LIST

#1	#2	#3	#4	#5
6 22	(F)		O	* @
		Ø8*30mm	2"*Ø1/4"*D11mm	1/2"*Ø1/4"*D11mm
Cam Bolt	Cam Lock	Wood Dowel	Long Bolt	Short Bolt
4 PCS (Extra 1)	4 PCS (Extra 1)	16 PCS (Extra 1)	6 PCS (Extra 1)	20 PCS (Extra 1)
#6	#7	#8	#9	#10
800		Damp	* mad	aaaa C
		Ø1/8"*13mm	1/2"*Ø3.5*D8mm	Ø12*7*D6mm
Barrel Nut	Door Hinge	Screw	Flat Head Screw	Round Head
6 PCS	4 PCS	24 PCS (Extra 1)	4 PCS (Extra 1)	Screw 22 PCS (Extra 1)
#11	#12	#13	#14	
	0			
Shelf Holder	Flat Washer	Allen Wrench	Safety Strap Kit	
4 PCS	4 PCS (Extra 1)	1 PC	1 PC	


ADDITIONAL TOOLS (Not Provided)

Note: It is not recommended to use power tools during assembly.



Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.


Please do not use tools to assemble this unit unless specifically indicated.

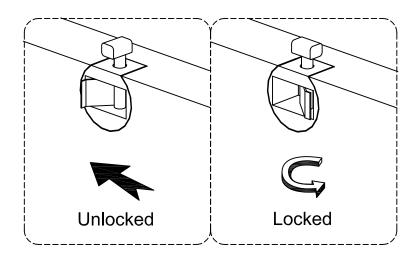


Reference the images above any time the instructions state "lock the hardware". Note: Be sure to check all hardware is locked when completed.

Step 1. Attach cam bolts (part #1) to panels (parts C & D) using phillips head screwdriver. Insert side frames (part M) into rails (parts N & O) using short bolts (part #5) and allen wrench (part #13).

NOTE: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

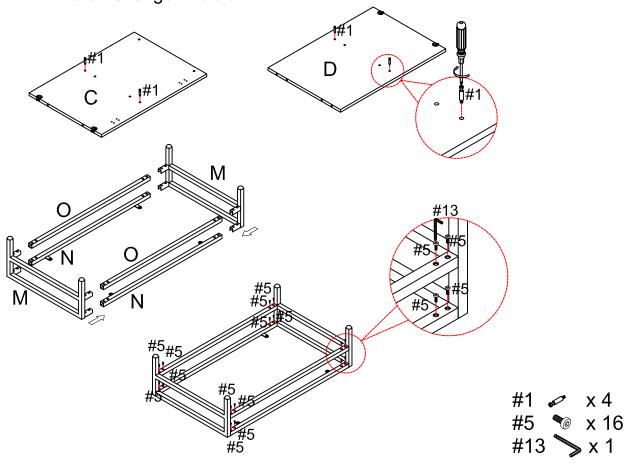


Step 2. Attach door hinges (part #7) to door panels (parts F & G) using screws (part #8) and phillips head screwdriver. Attach bracket (part P) to top panel (part A) using flat head screws (part #9) and phillips head screwdriver.

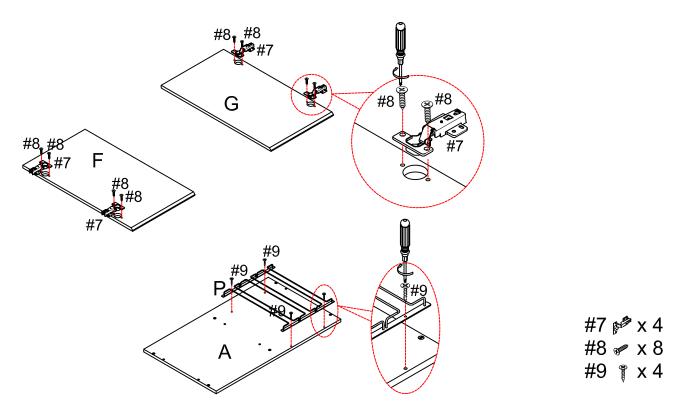


Step 3. Slide small wine racks (part K) to large wine racks (part L) as shown. Attach panels (parts C & D) to fixed shelf (part H) using wood dowels (part #3) and cam locks (part #2).


NOTE: Cam locks must rotate a full 180°. See pictured insert.

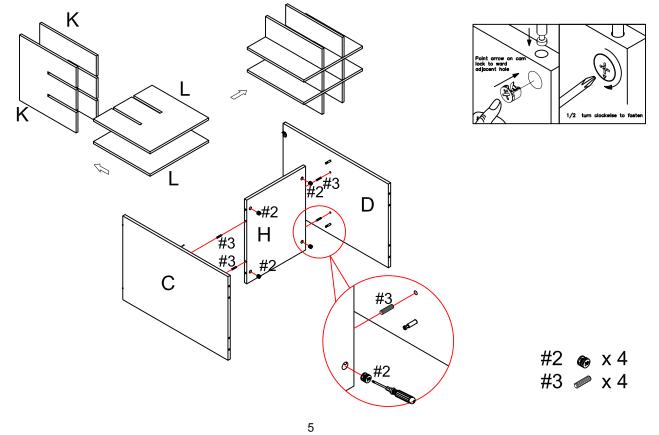


Step 4. Attach bottom panel (part B) to assembled unit (parts C & D) and then attach right panel (part E) to bottom panel (part B) using wood dowels (part #3), long bolts (part #4), barrel nuts (part #6) and allen wrench (part #13).

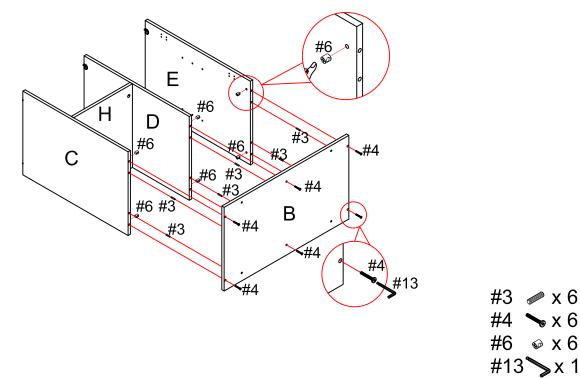

Step 5. Attach assembled unit (parts M, N & O) to bottom panel (part B) using short bolts (part #5), flat washers (part #12) and allen wrench (part #13).

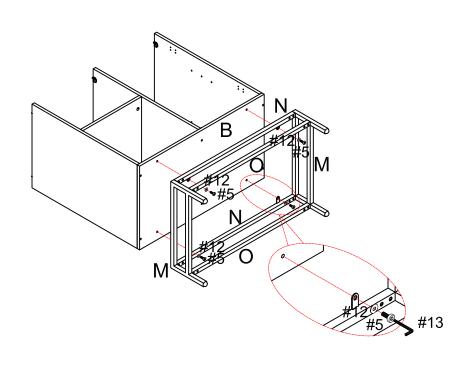


Step 6. Carefully turn unit upright. Attach top panel (part A) to assembled unit (parts C, D & E) using wood dowels (part #3) and lock the hardware.

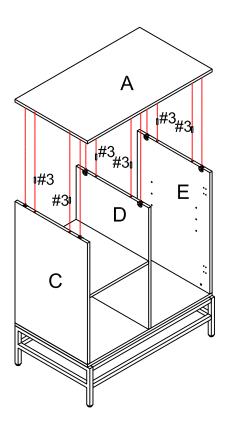


#3 🖋 x 6

Step 7. Attach back panels (part J) to assembled unit (parts A, B, C, D & E) using round head screws (part #10) and phillips head screwdriver.

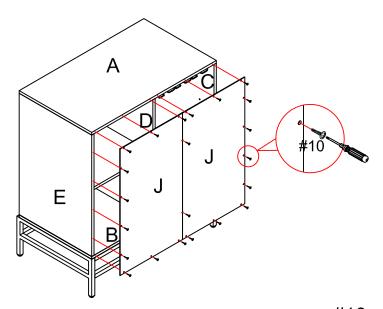

#10 🕶 x 22

Step 8. Place shelf holders (part #11) into desired position and then slide adjustable shelf (part I) into place. Slide assembled unit (parts K & L) into place.

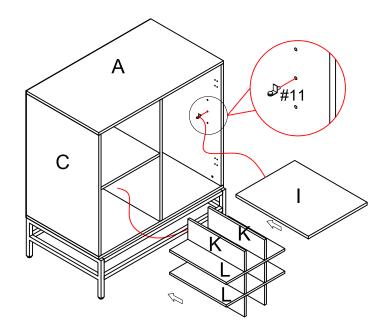


#11 & x 4

Step 9. Attach door panels (parts F & G) to panels (parts C & E) with door hinges using screws (part #8) and phillips head screwdriver.

NOTE: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #14) must be installed to prevent tipping, damage and/or injury.

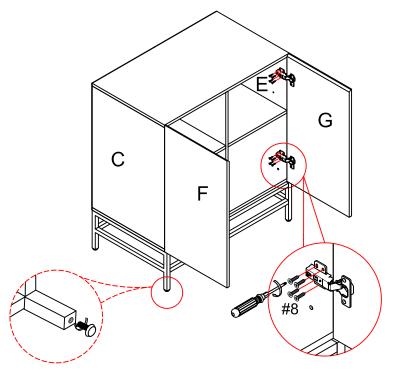

#8 ****** x 16

#14	A	В	D8*3/4"	D	E
Safety Strap Kit	Wall Anchor	Washer	Short Screw	Long Screw	Safety Wall Strap
1 PC	1 PC	2 PCS	1 PC	1 PC	1 PC

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

- 1.Insert short screw (C) through washer (B) and safety wall strap (E) and attach to back panel (part J) using phillips head screwdriver.
- 2.Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in back panel (part J) where the safety wall strap (E) is attached. Tap wall anchor (A) into the hole.
- 3.Insert long screw (D) through washer (B) and safety wall strap (E) into wall anchor (A) using phillips head screwdriver.

Note: This item is not intended for clothing storage use.

